


Ađır Hizmet Kr Koruyucu Otokorkuluk / Bridge Protective Heavy Duty Guardrail

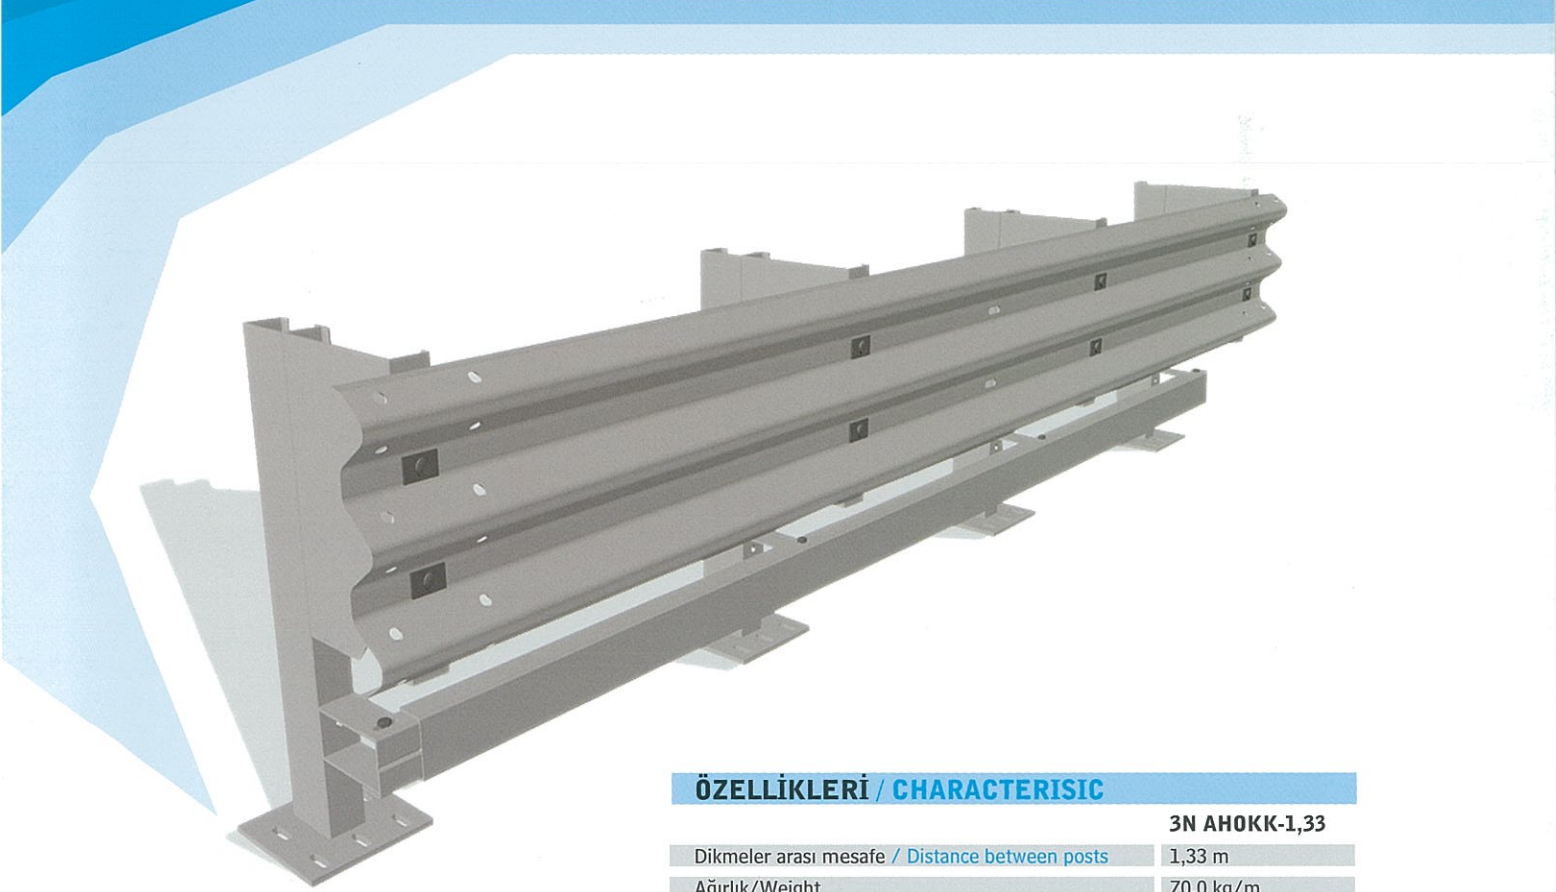

ZELLİKLERİ / CHARACTERISIC

3N AHOKK-1,33

Dikmeler arası mesafe / Distance between posts	1,33 m
Ađırlık/Weight	70,0 kg/m
Yerden ykseklik / Height above the ground	0,99 m
akma derinliđi / Depth of fixing	0
Max. para uzunluđu / max. part length	4,3 m
Tavsiye edilen min. uzunluk / Suggested min. length	60 m + end sections
elik kalitesi / Steel quality	S235JR
Galvanizleme / Galvanization	EN ISO 1461

Ağır Hizmet Köprü Koruyucu Otokorkuluk / Bridge Protective Heavy Duty Guardrail

PARÇA LİSTESİ / PARTS LIST

Parça / Part no:	Parça Tanımı / Description	Malzeme / Material
2	3N Takoz / Spacer - C profile "350x90x25x6 , L=554 mm"	S235JR
3	3N Ağır hizm. rayı / 3N Heavy Duty Guardrail "4320*740*3 mm"	S235JR
4	" U " Kirişi / "U" Beam "130x70x6 , L=4100 mm"	S235JR
5	" U " Kiriş Takozu / "U" Beam Spacer "106x210x6 , L=90 mm"	S235JR
6	Koruyucu ray parçası / Protective rail piece, "300*740*3 mm"	S235JR
7	Altıgen Civata / Hexagon bolt M16x40	4,6
8	Bombe Baş Civata / HRK Round Head Bolt M16x50	4,6
9	Bombe Baş Civata / HRK Round Head Bolt M16x35	4,6
10	Bombe Baş Civata / HRK Round Head Bolt M16x155	4,6
12	Dikme / Post - C profile "150x90x25x6 , L=972 mm"	S235JR
13	Plastik Taban plakası / Plastic Base plate "300*300*3 mm"	
14	Taban Plakası / Base plate "300x300x15 mm"	S235JR
15	Ankraj Civata / Anchor Bolt M18 ,L=185 mm	S235JR
40.30	Pul / Washer 18; ISO 7091	S235JR

